




## INTRODUCTION

Temperature indicators/ controllers play an important part in any process industry. Quick and accurate measurement / control of a process temperature will improve the final product quality, reliability and reduce rejection. Temperature indication and control is therefore one of the prime considerations in any process industry. The ESD 922 two setpoint series is a On / Off type digital temperature indicator/controller designed for fast and accurate measurement / control. The instrument is designed using highly reliable electronic components. The process temperature is displayed in digits, which gives better resolution compared to analog indicator. The ESD 922 two setpoint series accepts all types of Pt-100, Thermocouples, 0 - 20 mA as well as 4 - 20 mA as input. The instrument is immune to mechanical

## PRINCIPLE OF OPERATION

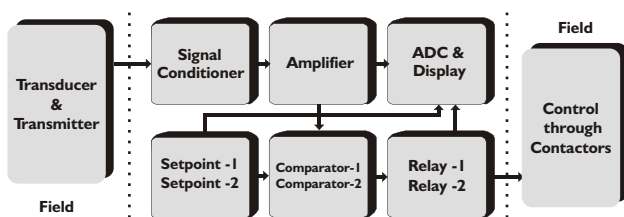

The ESD 922 two setpoint series is based on the principle high input impedance amplifier feeding a comparator followed by a relay and an ADC. The signal from the transducer is fed to a sensor compensation circuit, where automatic ambient compensation in case of thermocouple & lead resistance compensation in case of Pt-100 is achieved. Duly compensated signal is fed to a signal conditioning amplifier, output of which is given to digital display as well as to a comparator. The comparator compares the process value with the desired set value. Output of the comparator is given to the relay which switches ON or OFF depending upon the process value w.r.t. the setpoint. Linearisation of the transducer signal is done by hardware in the input circuit. This gives a standardized signal to the ADC which drives the LED display, indicating the temperature .



vibrations. Even the mounting position will not affect the measurement accuracy. The large bright RED LED seven segment display allows long distance readability. Use of highly reliable electronic components with lowest temperature coefficient ensure long and trouble free service. The instrument is tested for its performance under various climatic conditions. Wide ranges of measurements are available depending on the sensor used.

## APPLICATION

The ESD 922 two setpoint series temperature controllers can be used in almost any industry, laboratory etc. where accurate temperature control is needed to be carried out.


## FEATURES

- ✓ Proven trouble free field performance
- ✓ Highly compact
- ✓ Dust and vermin proof enclosure with epoxy powder coating
- ✓ LED display gives better readability at long range
- ✓ Fast response time
- ✓ Available in different DIN std. cutouts
- ✓ Designed for Pt-100, Thermocouples and 4 - 20 mA input
- ✓ Fail safe relay logic
- ✓ Maximum MTBF and minimum MTTR
- ✓ Feather touch push button
- ✓ Wide supply variation and environmental band

## SPECIFICATIONS

Model	: ESD 9223L	Relay output	: One set of potential free relay changeover contact rated 5 Amp resistive at 230V per setpoint
Ranges	: Std. as per chart below	Relay logic	: 1. Actual temp. < setpoint - Relay ON for heating application (factory set) 2. Actual temp. > setpoint - Relay ON for cooling application (on demand)
Input	: Pt - 100	Relay ON indication	: 3 mm RED LED
Digital inputs	: 6 nos	Fault indication	: 5 number 3 mm LED's (Pump, Fan, High Pressure, Low Pressure, Overload)
Indication	: 199.9 12.5 mm RED LED display	Control sensitivity	: 0.25% of full scale (adjustable inside)
Indication accuracy	: +/- 0.5 % of full scale +/- 1 digit	Sensor break protection	: Relay 'Off' (relay 'On' on demand)
Least count	: 0.1°C up to 200°C	Front facia	: ABS plastic suitable for IP 55 having size 96 x 96 mm
Power supply	: 230 V AC, +/- 10 % , 50 Hz with earth	Mounting	: Flush panel
Relative humidity	: Less than 90 % non condensing	Enclosure	: Mild steel CRCA sheet with powder coating
Accuracy deviation due to		Panel cutout	: 92 x 92 mm
a) Temperature change	: +/- 0.002 % /°C , ref at 25°C	Termination	: Screwed type suitable for 2.5mm <sup>2</sup> wire
b) Supply variation	: +/- 0.001 % / V	Weight	: 800 grams approximately
Sensor break indication	: Up scale [ I _ _ ] (down on demand)		
Recalibration (if reqd)	: By zero and span potentiometers inside		
Power consumption	: 6 VA		
Setpoints	: 2 (through ten turns potentiometer)		
Control action	: ON / OFF		
Setpoint read	: By pressing self release switch		
Setpoint setting	: By pressing self release switch and turning set potentiometer		

## INSTALLATION

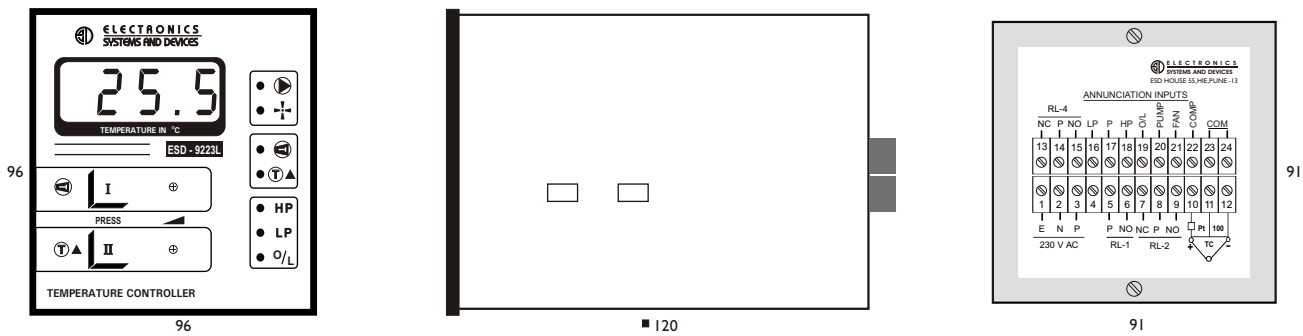

## ORDERING INFORMATION

<b>ESD 92</b>	<b>X1</b>	<b>X2</b>	<b>X3</b>	<b>X4</b>	<b>X5</b>	<b>X6</b>
	<b>Setpoints</b> 1 - One 2 - Two	<b>Panel cutout</b> 3 - 92 x 92	<b>Input</b> 1 - Pt - 100	<b>Range</b> 0 - -50 to 50°C	<b>Relay output</b> 1 - 1 C/O 5 Amp	<b>Power supply</b> 1 - 230 V AC

Input	Standard Ranges in °C		
Pt-100	-50 - 50	0 - 100	0 - 200

**Ordering eg. ESD 9223L - 1011**  
 Digital Temp. Controller ESD 92  
 Setpoints - Two (2)  
 Panel cutout - 92 x 92 mm (3)  
 Input - Pt - 100 (1)  
 Range - -50°C to 50°C (0)  
 Relay output - 1 C/o 5 Amp (1)  
 Power Supply - 230 V AC (1)

ALSO SELECT  
ESD ...

### BACK END

- ✓ Pt - 100
- ✓ Thermocouple
- ✓ Thermowells
- ✓ Compensating Cables

### SAME RANGE

- ✓ Single Setpoint Controllers
- ✓ Multi Setpoint Controllers
- ✓ Dual Channel Controllers
- ✓ Multi Channel Controllers

### FRONT END

- ✓ Alarm Annunciators
- ✓ Automation Panels



**ELECTRONICS  
SYSTEMS AND DEVICES**  
Process Control Instrumentation

ESD HOUSE,  
55, Hadapsar Indl. Estate,  
Pune - 411013 (INDIA).

Phone : (020) 26819611 to 15

E-mail : sales@esd-india.com

Web : www.esd-india.com



ESD/TIC/43 I I