




INTRODUCTION

Temperature Indicators and Controllers play an important part in any process industry. Quick and accurate measurement and control of a process temperature will help to improve the final product quality, reliability and reduce rejection. Temperature indication and control is therefore one of the prime considerations in any process industry.

The €SD Process Scanner with alarm series is based on microcontroller and is designed for fast and accurate measurement and control of temperature. The instrument is designed using highly reliable electronic components. The process temperature is displayed directly in digits, which gives better resolution.

€SD offers different application oriented models like only scanner, scanner with common alarm, scanner with group alarm, scanner with controller. All above models are available in different DIN

PRINCIPLE OF OPERATION

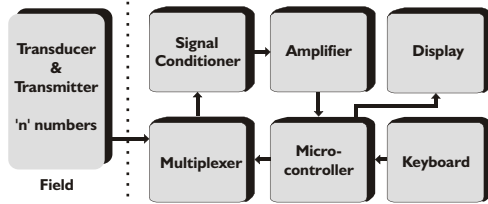

The €SD Process Scanner With Alarm series is based on the principle high input impedance amplifier feeding an analog to digital convertor. The input signal generated by the transducer is fed to a sensor compensation circuit, where automatic ambient compensation in case of thermocouple & lead resistance compensation in case of Pt-100 is achieved. Duly compensated signal is fed to a signal conditioning amplifier, output of which is given to CPU through ADC.

The linearization of the input signal from the transducer is done by software. This linearized signal is directly displayed on the display and compared with the set value by processor. Depending upon the status of input w.r.t. set point output to the relay driver is activated.

The processor scans all the inputs at a very fast rate and stores it in the memory. This stored data and programmed set values are displayed automatically as per the preset scan times.



standard cutouts suitable for 8 and 16 channels.

This series accepts all types of Thermocouples, Pt - 100, 0 to 20 mA as well as 4 - 20 mA as input. Wide ranges of measurements are available depending on the sensor used.

The instrument is immune to mechanical vibrations. Even the mounting position will not affect the measurement accuracy. The large bright RED LED seven segment display allows long distance readability. Use of highly reliable electronic components with low temperature coefficient ensure long and trouble free service. The instrument is tested for its performance under various climatic conditions.

FEATURES


- ✓ Proven trouble free field performance
- ✓ Highly compact
- ✓ Dust and vermin proof enclosure with epoxy powder coating
- ✓ LED display gives better readability at long range
- ✓ Fast response time
- ✓ Highly accurate
- ✓ Available in different DIN std. cutouts
- ✓ Designed for Pt-100, Thermocouples and 4 - 20 mA input
- ✓ Maximum MTBF and minimum MTTR
- ✓ Feather touch push button
- ✓ Wide supply variation and environmental band
- ✓ User friendly programming

SPECIFICATIONS

Model	: Smart A108	Setpoint	: Two per channel individually settable
No. of Inputs	: Eight	Relay logic	: Selectable between High - High, Low-Low and Low - High
Ranges	: Refer chart below (other on demand)	Output	: 2 nos. potential free relay contacts rated 5 amp resistive at 230 V AC
Input	: Pt - 100 / Thermocouple / 4 - 20 mA	Output type	: Common alarm and trip
Indication	: 9 9 9 . 9 12.5 mm RED LED display	Front facia	: ABS plastic suitable for IP 55 having size 96 x 96 mm
Number of digits	: 5 (1 for channel number and 4 for process value)	Mounting	: Flush panel
Indication accuracy	: +/- 0.25 % of full scale +/- 1 digit	Enclosure	: Mild steel CRCA sheet with powder coating
Least count	: Refer chart below (other on demand)	Panel cutout	: 92 x 92 mm
LED indication	: 8 nos of 3 mm RED LED for setpoint status	Termination	: Screwed type suitable for 2.5mm ² wire
Power supply	: 230 V AC, +/- 10 % , 50 Hz with earth	Weight	: 700 gms approximately
Relative humidity	: Less than 90 % non condensing	Optional	
Ambient temperature	: 0 to 55°C	A) Retransmission o/p	: Isolated 4-20mA proportional to average value of all inputs
Amb temp compensation	: Built in up to 55°C	Resolution	: 10 bit (0.016 mA step change)
Accuracy deviation due to		Load resistance	: Max 500 ohms
a) Temperature change	: +/- 0.002% /°C , ref at 25°C	B) Serial interface	: Isolated RS 485 (2 wire) / RS 232
b) Supply variation	: +/- 0.001% / V	Protocol	: Modbus RTU
Sensor break indication	: \square P E N	Chart	
Input impedance	: < 10 Mohms, (only for T/C input)		
Recalibration (if reqd)	: By software using keypad. To be done on channel 1 only		
Programming	: Using 4 keys membrane keypad. Default password is 134		
Power consumption	: 6 VA		
Channel skip	: By setting scan time as zero		
Scan time	: Individually adjustable from 0 - 99 seconds		
Display response time	: 0.5 seconds/channel		

Input	Std. Ranges in °C	Least count
Pt-100	-100 to 200 0 to 400	0.1°C
J	0 to 600	1°C
K	0 to 1200	
R, S	0 to 1600	
mA / mV	Programmable from -999 to 9999	Settable

INSTALLATION

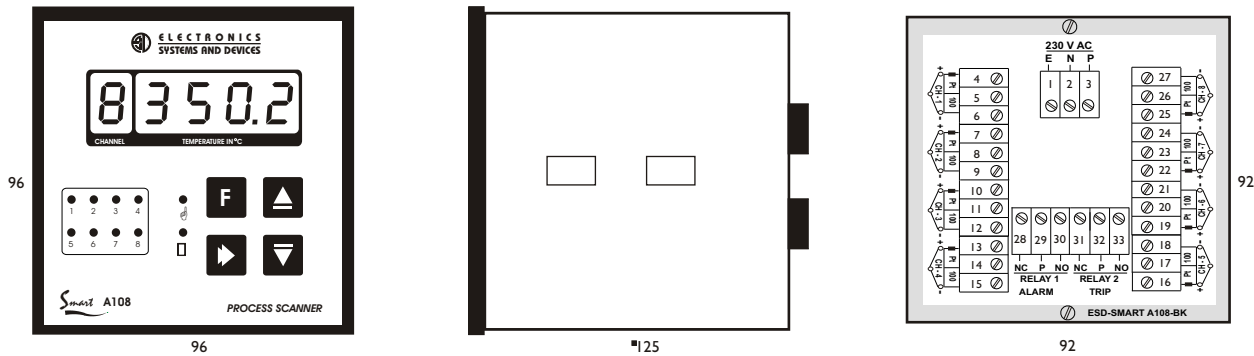

ORDERING INFORMATION

Smart A	X1	X2	X3	X4	X5	Ordering eg. Smart A108 - 111 Digital Temp. Scanner Smart A108 Panel cutout - 92 x 92 mm (1) No of inputs - Eight (08) Input - Pt - 100 (1) Range - 0°C to 400°C (0) Power Supply - 230 V AC (1)
	Panel Cutout 1 - 92 x 92 2 - 186 x 92	No. of Inputs 08 - Eight 16 - Sixteen	Input 1 - Pt - 100 2 - J type T/C 3 - K type T/C 4 - R type T/C 5 - S type T/C 6 - 0 to 20 mA 7 - 4 to 20 mA 8 - 0 to 2V DC 9 - Other	Range 0 - -100 to 200°C 1 - 0 to 400°C 2 - 0 to 600°C 3 - 0 to 1200°C 4 - 0 to 1600°C 5 - Other	Power Supply 1 - 230 V AC 2 - 110 V AC 3 - 24 V AC 4 - 24 V DC 5 - Other	

ALSO SELECT ESD ..	BACK END	SAME RANGE	FRONT END
	<ul style="list-style-type: none"> ✓ Pt - 100 ✓ Thermocouples ✓ Thermowells ✓ Compensating Cables 	<ul style="list-style-type: none"> ✓ Scanners ✓ Scanners With Controllers ✓ Data Acquisition System 	<ul style="list-style-type: none"> ✓ Alarm Annunciators ✓ Automation Panels ✓ PLC



ELECTRONICS SYSTEMS AND DEVICES
Process Control Instrumentation

ESD HOUSE,
55, Hadapsar Indl. Estate,
Pune - 411013 (INDIA).

Phone : (020) 26819611 to 15
E-mail : sales@esd-india.com
Web : www.esd-india.com

