




## INTRODUCTION

Temperature indicators /controllers play an important part in any process industry. Quick and accurate measurement / control of a process temperature will improve the final product quality, reliability and reduce rejection. Temperature indication and control is therefore one of the prime considerations in any process industry. The Sleek 62 series is microcontroller based programmable temperature indicator/controller designed for fast and accurate measurement /control. The instrument is designed using highly reliable electronic components. The process temperature is displayed in digits, which gives better resolution compared to analog indicator. The Sleek 62 setpoint series accepts all types of Pt -100, Thermocouples, 0 - 20 mA as well as 4 - 20 mA as input. The instrument is immune to mechanical



vibrations. Even the mounting position will not affect the measurement accuracy. The large bright RED LED seven segment display allows long distance readability. Use of highly reliable electronic components with lowest temperature coefficient ensure long and trouble free service. The instrument is tested for its performance under various climatic conditions. Wide ranges of measurements are available depending on the sensor used.

## PRINCIPLE OF OPERATION

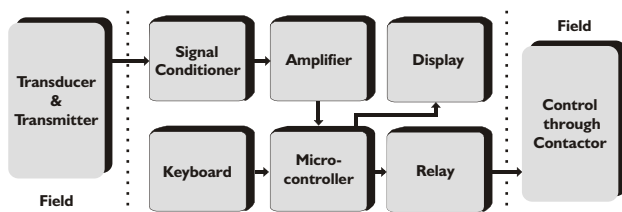

The Sleek 62 series is based on the principle of a high input impedance amplifier feeding a microcontroller followed by a relay and an inbuilt ADC. The signal from the transducer is fed to a sensor compensation circuit, where automatic ambient compensation in case of thermocouple & lead resistance compensation in case of Pt-100 is achieved. Duly compensated signal is fed to a signal conditioning amplifier, output of which is given to the 12 bit analog to digital convertor which is inbuilt the microcontroller. This microcontroller then switches the relay ON or OFF depending upon the process value with respect to the setpoint. Linearisation of the transducer signal is done by software. The microcontroller also drives the LED display, indicating the temperature.

## APPLICATION

The Sleek 62 series temperature controllers can be used in almost any industry, laboratory etc. where accurate temperature control is needed to be carried out.

## FEATURES


- ✓ Proven trouble free field performance
- ✓ Highly compact
- ✓ Dust and vermin proof enclosure with epoxy powder coating
- ✓ LED display gives better readability at long range
- ✓ Fast response time
- ✓ Highly accurate
- ✓ Available in different DIN std. cutouts
- ✓ Designed for Pt-100, Thermocouples and 4 - 20 mA input
- ✓ Fail safe relay logic
- ✓ Maximum MTBF and minimum MTTR
- ✓ Feather touch push button
- ✓ Wide supply variation and environmental band
- ✓ Minimum overshoot undershoot
- ✓ User friendly programming

## SPECIFICATIONS

Model	: Sleek 6243	Relay logic	: User selectable high or low
Ranges	: Refer chart below (other on demand)	Relay ON indication	: 3mm RED LED
Input	: Pt - 100 / 4 - 20 mA	Sensor break protection	: Relay 'Off' (Relay 'On' on demand)
Indication	: 9 9 9 . 9 9 12.5 mm RED LED display	Front facia	: ABS plastic suitable for IP 55 having size 96 x 96 mm
Indication accuracy	: +/- 0.25 % of full scale +/- 1 digit	Mounting	: Flush panel
Least count	: Refer chart below (other on demand)	Enclosure	: Mild steel CRCA sheet with powder coating
Power supply	: 230 V AC, +/- 10 % , 50 Hz with earth	panel cutout	: 92 x 92 mm
Relative humidity	: Less than 90% non condensing	Termination	: Screwed type suitable for 2.5 mm <sup>2</sup> wire
Ambient temperature	: 0 to 55°C	Weight	: 700 grams
Accuracy deviation due to		Optional	
a) Temperature change	: +/- 0.002 % /°C, ref at 25°C	A) Retransmission o/p	: Isolated 4-20mA proportional to process value
b) Supply variation	: +/- 0.001 % / V	Resolution	: 10 bit (0.016 mA step change)
Sensor break indication	: <b>O P E N</b>	Load resistance	: Max 500 ohms
Recalibration (if reqd)	: By software using keypad	B) Serial interface	: Isolated RS 485 (2 wire) / RS 232
Programming	: Using 4 keys membrane keypad. Default password is 134	Protocol	: Modbus RTU
Power consumption	: 6 VA	Chart	:
Transmitter supply	: 24 V DC @ 30mA (only for 4-20mA)		
Setpoints	: 4		
Control action	: ON/OFF		
Set point Adjust	: Using 4 keys membrane keypad		
On / Off differential	: From 1 to 99 (for LC = 1) From 0.1 to 9.9 (for LC = 0.1)		
On / Off delay time	: From 0 to 240 seconds		
Relay output	: One set of potential free relay changeover contact rated 5 Amp resis. @230V AC per		

Input	Std. Ranges in °C	Least count
Pt-100	-100 to 200 0 to 400	0.1°C
mA / mV	Programmable from -999 to 9999	Settable

## INSTALLATION

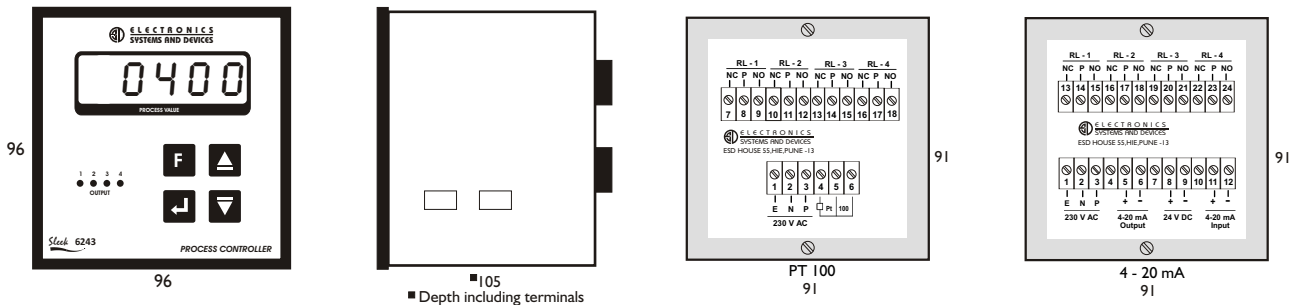

## ORDERING INFORMATION

<b>Sleek 62</b>	<b>X1</b>	<b>X2</b>	<b>X3</b>	<b>X4</b>	<b>X5</b>	<b>X6</b>
	<b>Setpoints</b> 2 - Two 4 - Four	<b>Panel Cutout</b> 0 - 92 x 45 3 - 92 x 92	<b>Input</b> 1 - Pt - 100 2 - 4 to 20 mA 3 - 0 to 2V DC 4 - Other	<b>Range</b> 0 - -100 to 200°C 1 - 0 to 400°C 2 - Other	<b>Relay Output</b> 1 - 1 C/O 5 Amp 2 - 1 C/O 10 Amp 3 - 2 C/O 5 Amp 4 - Other	<b>Ordering eg. Sleek 6243 -7111</b> Digital Temp. Controller Sleek 62 Setpoint - Four (4) Panel cutout - 92 x 92 mm (3) Input - 4 to 20 mA (7) Range - 0°C to 400°C (1) Relay output - 1 C/O 5 Amp (1) Power Supply - 230 V AC (1)
					<b>Power Supply</b> 1 - 230 V AC 2 - 110 V AC 3 - 24 V AC 4 - 24 V DC 5 - Other	

**ALSO SELECT ESD ...**

### BACK END

- ✓ Pt - 100
- ✓ Thermocouples
- ✓ Thermowells
- ✓ Compensating Cables

### SAME RANGE

- ✓ Dual Channel Controllers
- ✓ Supersize controllers
- ✓ PI Controllers
- ✓ Field Mounting Controllers
- ✓ Profile Controllers

### FRONT END

- ✓ Alarm Annunciators
- ✓ Automation Panels



**ELECTRONICS SYSTEMS AND DEVICES**  
Process Control Instrumentation

ESD HOUSE,  
55, Hadapsar Indl. Estate,  
Pune - 411013 (INDIA).

Phone : (020) 26819611 to 15

E-mail : sales@esd-india.com

Web : www.esd-india.com



ESD/PTC/4510