



INTRODUCTION

Temperature Indicators and Controllers play an important part in any process industry. Quick and accurate measurement and control of a process temperature will help to improve the final product quality, reliability and reduce rejection. Temperature indication and control is therefore one of the prime considerations in any process industry.

The ESD Process Scanner series is based on microcontroller and is designed for fast and accurate measurement and control of temperature. The instrument is designed using highly reliable electronic components. The process temperature is displayed directly in digits, which gives better resolution.


ESD offers different application oriented models like only scanner, scanner with common alarm, scanner with group alarm, scanner with controller. All above models are available in different DIN standard cutouts suitable for 8 and 16 channels.



This series accepts all types of Thermocouples, Pt - 100, 0 to 20 mA as well as 4 - 20 mA as input. Wide ranges of measurements are available depending on the sensor used.

The instrument is immune to mechanical vibrations. Even the mounting position will not affect the measurement accuracy. The large bright RED LED seven segment display allows long distance readability. Use of highly reliable electronic components with low temperature coefficient ensure long and trouble free service. The instrument is tested for its performance under various climatic conditions.

PRINCIPLE OF OPERATION

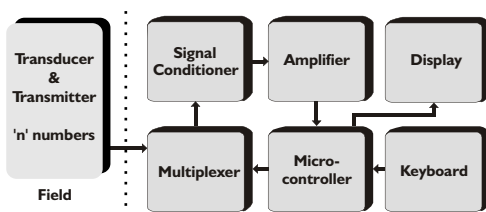

The ESD Process Scanner series is based on the principle high input impedance amplifier feeding an analog to digital convertor. The input signal generated by the transducer is fed to a sensor compensation circuit, where automatic ambient compensation in case of thermocouple & lead resistance compensation in case of Pt-100 is achieved. Duly compensated signal is fed to a signal conditioning amplifier, output of which is given to CPU through ADC.

The linearization of the input signal from the transducer is done by software. This linearized signal is directly displayed on the display and compared with the set value by processor.

The processor scans all the inputs at a very fast rate and stores it in the memory. This stored data and programmed set values are displayed automatically as per the preset scan times.

FEATURES

- ✓ Proven troublefree field performance
- ✓ Highly compact
- ✓ ABS plastic enclosure in DIN mounting
- ✓ LED display gives better readability at long range
- ✓ Fast response time
- ✓ Highly accurate
- ✓ Designed for Pt-100, Thermocouples and 4 - 20 mA input
- ✓ Maximum MTBF and minimum MTTR
- ✓ Feather touch push button
- ✓ Wide supply variation and environmental band
- ✓ User friendly programming

SPECIFICATIONS

Model : Smart S108W
No of inputs : Four / Eight
Ranges : Refer chart below (other on demand)
Input : Pt - 100 / Thermocouple / 4 - 20 mA
Indication : 9 9 9 . 9 10 mm RED LED display
Number of digits : 5 (1 for channel number and 4 for process value)
Indication accuracy : +/- 0.25 % of full scale +/- 1 digit
Least count : Refer chart below (other on demand)
Power supply : 230 V AC, +/- 10 % , 50 Hz with earth
Relative humidity : Less than 90 % non condensing
Ambient temperature : 0 to 55°C
Amb. Temp. compensation : Built in up to 55°C
Accuracy deviation due to
 a) Temperature change : +/- 0.002 % / °C, ref at 25°C
 b) Supply variation : +/- 0.001 % / V
Sensor break indication : *OPEN*
Input impedance : < 10 Mohms, (only for T/C input)
Recalibration (if reqd) : By software using keypad. To be done on channel 1 only
Programming : Using 4 keys membrane keypad. Default password is 134
Power consumption : 6 VA
Channel skip : By setting scan time as zero seconds
Scan time : Individually adjustable from 0 - 99 seconds
Display response time : 0.5 seconds / channel
Dimensions : 75 (H) x 100 (W) x 75 (D) mm
Mounting : DIN Rail


Enclosure : ABS plastic
Termination : Screwed type suitable for 2.5 mm² wire
Weight : 600 gm approximately
Optional
 A) Retransmission o/p : Isolated 4-20 mA proportional to average value of all inputs
Resolution : 10 bit (0.016 mA step change)
Load resistance : Max 500 ohms
 B) Serial interface : Isolated RS 485 (2 wire) / RS 232
Protocol : Modbus RTU

Chart

Input	Std. Ranges in °C	Least count
Pt-100	-100 to 200 0 to 400	0.1°C
J	0 to 600	1°C
K	0 to 1200	
R, S	0 to 1600	
mA / mV	Programmable from -999 to 9999	Settable

ORDERING INFORMATION

Smart S108W

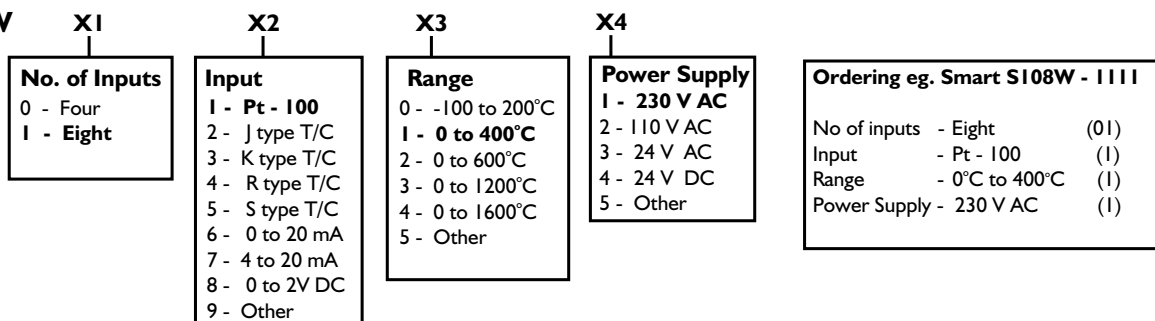

ALSO SELECT ESD ...

BACK END

- ✓ Pt - 100
- ✓ Thermocouples
- ✓ Thermowells
- ✓ Compensating Cables

SAME RANGE

- ✓ Scanners With Alarm
- ✓ Scanners With Controllers
- ✓ Data Acquisition System

FRONT END

- ✓ Automation Panels
- ✓ PLC



**ELECTRONICS
 SYSTEMS AND DEVICES**
 Process Control Instrumentation

ESD HOUSE,
 55, Hadapsar Indl. Estate,
 Pune - 411013 (INDIA).

Phone : (020) 26819611 to 15

E-mail : sales@esd-india.com

Web : www.esd-india.com

