




INTRODUCTION

Temperature indicators in temperature measurement play an important part in any process industry. Quick and accurate measurement of process temperature will improve the final product quality, reliability and reduce rejection. Temperature indication is therefore one of the prime considerations in any process industry. The ESD 901 series Digital temperature indicators are designed for fast and accurate temperature measurement. The instrument is designed using highly reliable electronic components. The process temperature is displayed directly in digits, which gives better resolution compared to analog indicator. The ESD 901 series accepts all types of Thermocouples, Pt - 100, 0 - 20 mA as well as 4 - 20 mA as input. Wide ranges of measurements are available depending on the sensor used. The instrument is immune to mechanical vibrations. Even the mounting position will not affect the



measurement accuracy. The large bright RED LED seven segment display allows long distance readability. Use of highly reliable electronic components with low temperature coefficients ensure long and trouble free service. The instrument is tested for its performance under various climatic conditions.

PRINCIPLE OF OPERATION



The ESD 901 series is based on the principle of a high input impedance amplifier feeding an analog to digital convertor. The input signal generated by the transducer is fed to a sensor compensation circuit, where automatic ambient compensation in case of thermocouple & lead resistance compensation in case of Pt-100 is achieved. Duly compensated signal is fed to a signal conditioning amplifier, output of which is given to digital display. The linearisation of the input signal from the transducer is done by hardware in the input circuit. This gives a standardized signal to the analog to digital convertor which drives the seven segment LED display, indicating the temperature directly.

APPLICATION

The ESD 901 series temperature indicator can be used in almost any industry, laboratory etc. where accurate temperature indication is needed to be carried out.

FEATURES


- ✓ Proven trouble free field performance
- ✓ Highly compact
- ✓ Dust and vermin proof enclosure with epoxy powder coating
- ✓ LED display gives better readability at long range
- ✓ Fast response time
- ✓ Available in different DIN std. cutouts
- ✓ Designed for Pt-100, Thermocouples and 4 - 20 mA input
- ✓ Maximum MTBF and minimum MTTR
- ✓ Wide supply variation and environmental band

SPECIFICATIONS

Model	: ESD 9014	Sensor break indication	: Up scale [1 _ _ _] (Down on demand)
Ranges	: Std. as per chart below (other on demand)	Input impedance	: < 10 Mohms, (only for T/C input)
Input	: Pt - 100 / Thermocouple / 4 - 20 mA	Power consumption	: 3 VA
Indication	: 1 9 9 . 9 7 segment 12.5 mm RED LED display	Front facia	: ABS plastic suitable for IP 55 having size 144 mm x 72 mm
Indication accuracy	: +/- 0.5 % of full scale +/- 1 digit	Cutout	: 138 mm x 68 mm
Least count	: 0.1°C up to 200°C, 1°C above 200°C	Mounting	: Flush panel
Power supply	: 230 V AC, +/- 10 % , 50 Hz with earth	Enclosure	: Mild steel CRCA sheet with powder coating
Relative humidity	: Less than 90 % non condensing	Termination	: Screwed type suitable for 2.5mm ² wire
Ambient temperature	: 0 to 55°C	Weight	: 600 grams approximately
Amb. temp. Compensation	: Built in up to 55°C	Optional	: 4 - 20 mA retransmission output
Recalibration (if reqd)	: By zero and span potentiometers inside		
Accuracy deviation due to			
a) Temperature change	: +/- 0.002 % / °C , ref at 25°C		
b) Supply variation	: +/- 0.001 % / V		

Input	Standard Ranges in °C		
Pt-100	-50 - 50	0 - 100	0 - 200
J	0 - 200	0 - 400	0 - 600
K	0 - 200	0 - 400	0 - 600
	0 - 800	0 - 1000	0 - 1200
R, S	800 - 1600		
mA / mV	0 to 100 % or process value		

INSTALLATION

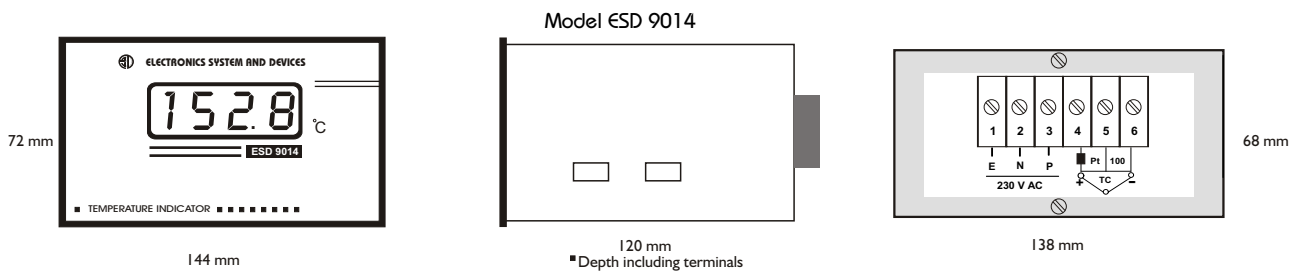

ORDERING INFORMATION

ESD 90	X1	X2	X3	X4	X5	Ordering eg. ESD 9014 - 101 Digital Temp. Indicator ESD 90 No of inputs - One (1) Panel cutout - 138 x 68 mm (4) Input - Pt - 100 (1) Range - -50°C to 50°C (0) Power Supply - 230 V AC (1)
Input 1 - One	Panel cutout 0 - 92 x 45 2 - 68 x 68 3 - 92 x 92 4 - 138 x 68	Input 1 - Pt - 100 2 - J type T/C 3 - K type T/C 4 - R type T/C 5 - S type T/C 6 - 0 to 20 mA 7 - 4 to 20 mA 8 - Other	Range 0 - -50 to 50°C 1 - 0 to 100°C 2 - 0 to 200°C 3 - 0 to 100 % 4 - 0 to 400°C 5 - 0 to 600°C 6 - 0 to 800°C 7 - 0 to 1000°C 8 - 0 to 1200°C 9 - Other	Power supply 1 - 230 V AC 2 - 110 V AC 3 - 24 V AC 4 - 24 V DC 5 - Other		

ALSO SELECT ESD ...	BACK END	SAME RANGE	FRONT END
	<ul style="list-style-type: none"> ✓ Pt - 100 ✓ Thermocouples ✓ Thermowells ✓ Compensating Cables 	<ul style="list-style-type: none"> ✓ Multi Input Indicators ✓ Supersize Display Indicators ✓ Multi Channel Indicators ✓ Flameproof Indicators ✓ Portable Indicators ✓ Field Mounting Indicators 	<ul style="list-style-type: none"> ✓ Automation Panel



**ELECTRONICS
SYSTEMS AND DEVICES**
Process Control Instrumentation

ESD HOUSE,
55, Hadapsar Indl. Estate,
Pune - 411013 (INDIA).

Phone : (020) 26819611 to 15

E-mail : sales@esd-india.com

Web : www.esd-india.com

