



INTRODUCTION

Temperature Indicators and Controllers play an important part in any process industry. Quick and accurate measurement and control of a process temperature will help to improve the final product quality, reliability and reduce rejection. Temperature indication and control is therefore one of the prime considerations in any process industry.

The ESD Process Scanner With Controller series is based on microcontroller and is designed for fast and accurate measurement and control of temperature. The instrument is designed using highly reliable electronic components. The process temperature is displayed directly in digits, which gives better resolution.

ESD offers different application oriented models like only scanner, scanner with common alarm,




scanner with group alarm, scanner with controller. All above models are available in different DIN standard cutouts suitable for 8 and 16 channels.

This series accepts all types of Thermocouples, Pt - 100, 0 to 20 mA as well as 4 - 20 mA as input. Wide ranges of measurements are available depending on the sensor used.

The instrument is immune to mechanical vibrations. Even the mounting position will not affect the measurement accuracy. The large bright red LED seven segment display allows long distance readability. Use of highly reliable electronic components with low temperature coefficient ensure long and trouble free service. The instrument is tested for its performance under various climatic conditions.

PRINCIPLE OF OPERATION

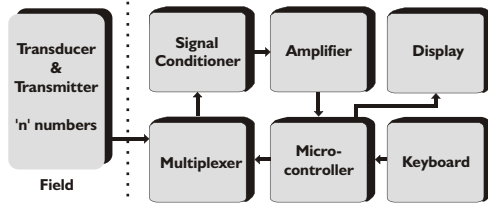

The ESD Process Scanner With Controller series is based on the principle of high input impedance amplifier feeding an analog to digital convertor. The input signal generated by the transducer is fed to a sensor compensation circuit, where automatic ambient compensation in case of thermocouple & lead resistance compensation in case of Pt-100 is achieved. Duly compensated signal is fed to a signal conditioning amplifier, output of which is given to CPU through ADC.

The linearization of the input signal from the transducer is done by software. This linearized signal is directly displayed on the display and compared with the set value by processor. Depending upon the status of input w.r.t. set point output to the relay driver is activated.

The processor scans all the inputs at a very fast rate and stores it in the memory. This stored data and programmed set values are displayed automatically as per the preset scan times.

FEATURES


- ✓ Proven trouble free field performance
- ✓ Highly compact
- ✓ Dust and vermin proof enclosure with epoxy powder coating
- ✓ LED display gives better readability at long range
- ✓ Fast response time
- ✓ Highly accurate
- ✓ Available in different DIN std. cutouts
- ✓ Designed for Pt-100, Thermocouples and 4 - 20 mA input
- ✓ Maximum MTBF and minimum MTTR
- ✓ Feather touch push button
- ✓ Wide supply variation and environmental band
- ✓ User friendly programming

SPECIFICATIONS


Model	: Smart C208	Relay logic	: User selectable high or low
No. of Inputs	: 8	Output	: 1 nos. potential free relay contacts rated 5 amp resistive at 230 V AC per setpoint
Ranges	: Refer chart below (other on demand)	Number of outputs	: 8
Input	: Pt - 100 / Thermocouple / 4 - 20 mA	Relay card	: To be mounted externally
Indication	: 9 9 9 . 9 12.5 mm RED LED display	Mounting of relay card	: Chassis
Number of digits	: 7 (2 for channel number, 4 for process value and 1 for unit)	Front facia	: ABS plastic suitable for IP 55 having size 192 x 96 mm
Indication accuracy	: +/- 0.1 % of full scale +/- 1 digit	Panel cutout	: 186 x 92 mm
Least count	: Refer chart below (other on demand)	Mounting	: Flush panel
LED indication	: 8 nos of 3 mm RED LEDs for setpoint status	Enclosure	: Mild steel CRCA sheet with powder coating
Power supply	: 230 V AC, +/- 10 % , 50 Hz with earth	Termination	: Screwed type suitable for 2.5mm ² wire
Relative humidity	: Less than 90 % non condensing	Weight	: 1 kg approximately
Ambient temperature	: 0 to 55°C	Optional	
Amb temp compensation	: Built in up to 55°C	A) Retransmission o/p	: Isolated 4-20mA proportional to average value of all inputs
Accuracy deviation due to		Resolution	: 16 bit (0.016 mA step change)
a) Temperature change	: +/- 0.002% /°C , ref at 25°C	Load resistance	: Max 500 ohms
b) Supply variation	: +/- 0.001% / V	B) Serial interface	: Isolated RS 485 (2 wire) / RS 232
Sensor break indication	: \square P E N	Protocol	: Modbus RTU
Input impedance	: < 10 Mohms, (only for T/C input)	Chart	
Recalibration (if reqd)	: By software using keypad. To be done on channel 1 only		
Programming	: Using 4 keys membrane keypad. Default password is 134		
Power consumption	: 6 VA		
Channel skip	: By setting scan time as zero		
Scan time	: Individually adjustable from 0 - 99 seconds		
Setpoint	: Two per channel individually settable		
Display response time	: 0.5 seconds/channel		

Input	Std. Ranges in °C	Least count
Pt-100	-100 to 200 0 to 400	0.1°C
J	0 to 600	1°C
K	0 to 1200	
R, S	0 to 1600	
mA / mV	Programmable from -999 to 9999	Settable

INSTALLATION

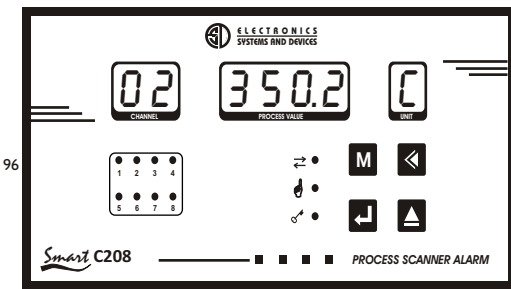


192



145

*Depth including terminals

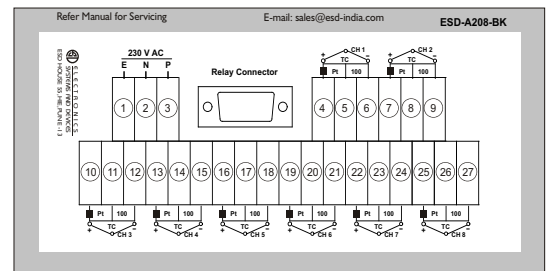

186

ORDERING INFORMATION

Smart C	X1	X2	X3	X4	X5	Ordering eg. Smart C208 - 111
	Panel Cutout	No. of Inputs	Input	Range	Power Supply	Digital Temp. Scanner Smart C208
	1 - 92 x 92	08 - Eight	1 - Pt - 100	0 - -100 to 200°C	1 - 230 V AC	Panel cutout - 186 x 92 mm (2)
	2 - 186 x 92	16 - Sixteen	2 - J type T/C	1 - 0 to 400°C	2 - 110 V AC	No of inputs - Eight (08)
			3 - K type T/C	2 - 0 to 600°C	3 - 24 V AC	Input - Pt - 100 (1)
			4 - R type T/C	3 - 0 to 1200°C	4 - 24 V DC	Range - 0°C to 400°C (1)
			7 - 4 to 20 mA	4 - 0 to 1600°C	5 - Other	Power Supply - 230 V AC (1)
			9 - Other	5 - Other		

ALSO SELECT ESD ...

BACKEND

- ✓ Pt - 100
- ✓ Thermocouples
- ✓ Thermowells
- ✓ Compensating Cables

SAME RANGE

- ✓ Scanners
- ✓ Scanners With Alarm
- ✓ Data Acquisition Systems

FRONT END

- ✓ Alarm Annunciators
- ✓ Automation Panels
- ✓ PLC



ELECTRONICS
SYSTEMS AND DEVICES
Process Control Instrumentation

ESD HOUSE,
55, Hadapsar Indl. Estate,
Pune - 411013 (INDIA).

Phone : (020) 26819611 to 15

E-mail : sales@esd-india.com

Web : www.esd-india.com

